


SCHATTELLO TECHNICAL DATA

Round




		Ø 4.0 m	Ø 5.0 m	Ø 6.0 m	Ø 6.0 m
Segments		8	8	8	12
Area	m ²	12	19	27	28
A Height closed incl. top plate	cm	410	425	440	450
B Height opened incl. top plate	cm	303	318	333	343
C Headroom with valance	cm	205	205	200	205
D Headroom without valance	cm	227	227	222	237
E Height of valance	cm	28	28	28	28
F Ground clearance from spoke edge	cm	193	158	123	132
G Height of lower disc flange	cm	183	198	213	223
Weight without packaging MayTex-Acryl without valance	kg	27	38	45	52
Support pole diameter r	mm	outer-Ø 76, pole thickness 3			
Packaging cardboard sleeve length 444 cm		Ø 33 cm approx. 17 kg		Ø 35 cm approx. 18 kg	
Installation base length/width/min. depth	cm	50/50/60		60/60/60	
Minimum-ballast Number of layers of concrete slabs X250 required		1 x = approx. 112 kg		2 x = approx. 224 kg	

Triangular



		4 x 4 x 4 m	6 x 6 x 6 m
Segments		6	6
Area	m ²	6.9	15.6
A Height closed incl. top plate	cm	391	402
B Height opened incl. top plate	cm	284	295
C Headroom with valance	cm	215	215
D Headroom without valance	cm	237	237
E Height of valance	cm	28	28
F Ground clearance from spoke edge	cm	153	51
G Height of lower disc flange	cm	234	183
Weight without packaging MayTex-Acryl without valance	kg	27	40
Support pole diameter r	mm	outer-Ø 76, pole thickness 3	
Packaging cardboard sleeve length 444 cm		Ø 33 cm approx. 17 kg	
Installation base length/width/min. depth	cm	50/50/60	
Minimum-ballast Number of layers of concrete slabs X250 required		1 x = approx. 112 kg	

Square




		3.0 x 3.0 m	3.5 x 3.5 m	4.0 x 4.0 m	4.5 x 4.5 m	5.0 x 5.0 m
Segments		8	8	8	8	8
Area	m ²	9	12.25	16	20.25	25
A Height closed incl. top plate	cm	410	418	425	433	440
B Height opened incl. top plate	cm	300	308	315	323	330
C Headroom with valance	cm	215	215	215	215	215
D Headroom without valance	cm	237	237	237	237	237
E Height of valance	cm	28	28	28	28	28
F Ground clearance from spoke edge	cm	180	154	119	96	62
G Height of lower disc flange	cm	252	190	198	203	213
Weight without packaging MayTex-Acryl without valance	kg	25	34	43	52	58
Support pole diameter r	mm	outer-Ø 76, pole thickness 3				
Packaging cardboard sleeve length 444 cm		Ø 33 cm approx. 17 kg				
Installation base length/width/min. depth	cm	50/50/60				60/60/60
Minimum-ballast Number of layers of concrete slabs X250 required		1 x = approx. 112 kg				2 x = approx. 224 kg

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (S2118, S2146, S2150). The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	SZ201 +14 cm
Full frame pedestal:	SZ203 +17 cm
Full frame pedestal:	SZ205 +21 cm
Full frame pedestal:	SZ411 + 9 cm
Full frame pedestal:	SZ412 +12 cm
Full frame pedestal:	SZ414 +16 cm
Full frame pedestal:	SZ420 +19 cm
Anchor plate:	SZ131 +1,5 cm
Anchor plate:	SZ261 + 5 cm
Base plate:	SZ272 + 4 cm
Base plate:	SZ273 + 4 cm
Base plate:	SZ274 + 4 cm
Base plate:	SZ275 + 4 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.



Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

SCHATTELLO TECHNICAL DATA

Rectangular




		2.0 x 4.0 m	2.5 x 3.0 m	2.5 x 3.5 m	2.5 x 4.0 m	2.5 x 5.0 m
Segments		6	8	8	8	6
Area	m ²	8	7.5	8.8	10	12.5
A	Height closed incl. top plate	cm	387	399	397	397
B	Height opened incl. top plate	cm	280	301	298	298
C	Headroom with valance	cm	215	215	215	215
D	Headroom without valance	cm	237	237	237	237
E	Height of valance	cm	28	28	28	28
F	Ground clearance from spoke edge	cm	152	193	175	150
G	Height of lower disc flange	cm	237	246	243	240
Weight without packaging	kg	28	28	30	31	32
Support pole diameter	mm	outer-Ø 76, pole thickness 3				
Packaging		Ø 33 cm approx. 17 kg				
Installation base	cm	50/50/60				
Minimum ballast		1 x = approx. 112 kg				


The heights specified are for parasols with MayTex-Acrylic covering fabric that are mounted in an anchor tube (SZ118, SZ14 & SZ150). The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	SZ201 + 14 cm
Full frame pedestal:	SZ203 + 17 cm
Full frame pedestal:	SZ205 + 21 cm
Full frame pedestal:	SZ411 + 9 cm
Full frame pedestal:	SZ412 + 12 cm
Full frame pedestal:	SZ414 + 16 cm
Full frame pedestal:	SZ420 + 19 cm
Anchor plate:	SZ131 + 1,5 cm
Anchor plate:	SZ261 + 5 cm
Base plate:	SZ272 + 4 cm
Base plate:	SZ273 + 4 cm
Base plate:	SZ274 + 4 cm
Base plate:	SZ275 + 4 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.



Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.




		3.0 x 3.5 m	3.0 x 4.0 m	3.0 x 4.5 m	3.0 x 5.0 m	3.0 x 6.0 m	3.5 x 4.0 m	3.5 x 4.5 m	3.5 x 5.0 m
		8	8	8	8	8	8	8	8
		10.5	12	13.5	15	18	14	15.8	17.5
A	Height closed incl. top plate	cm	402	397	405	397	405	410	420
B	Height opened incl. top plate	cm	305	298	298	290	298	303	313
C	Headroom with valance	cm	215	215	215	215	215	215	215
D	Headroom without valance	cm	237	237	237	237	237	237	237
E	Height of valance	cm	28	28	28	28	28	28	28
F	Ground clearance from spoke edge	cm	160	135	124	97	63	135	117
G	Height of lower disc flange	cm	250	245	203	245	190	187	230
		32	28	31	32	34	36	38	40
		outer-Ø 76, pole thickness 3							
		Ø 33 cm approx. 17 kg							
		50/50/60							
		1 x = approx. 112 kg							

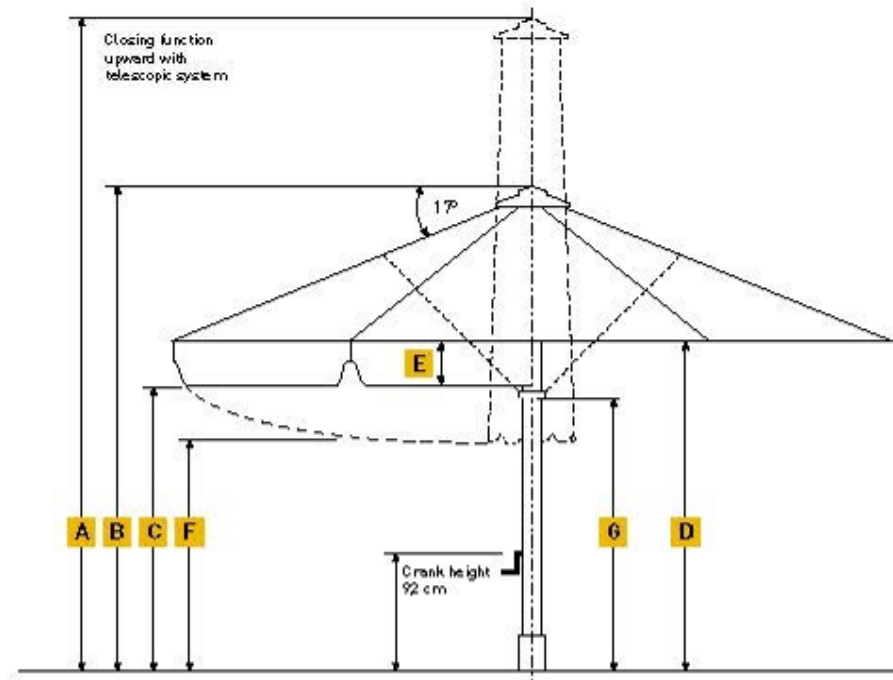

SCHATTELLO TECHNICAL DATA

Rectangular




4.0 x 4.5 m 4.0 x 5.0 m 4.0 x 6.0 m

Segments		8	8	8
Area	m ²	18	20	24
A Height closed incl. top plate	cm	416	420	425
B Height opened incl. top plate	cm	293	313	318
C Headroom with valance	cm	215	215	215
D Headroom without valance	cm	237	237	237
E Height of valance	cm	28	28	28
F Ground clearance from spoke edge	cm	105	94	54
G Height of lower disc flange	cm	225	198	203
Weight without packaging MayTex-Acyl without valance	kg	44	36	40
Support pole diameter	mm	outer-Ø 76, pole thickness 3		
Packaging cardboard sleeve length 999 cm		Ø 33 cm approx. 17 kg		
Installation base length/width/min. depth	cm	50 / 50 / 60 60 / 60 / 60		
Minimum ballast Number of layers of concrete slabs X250 required		1x = approx. 112 kg 2x = approx. 224 kg		

The heights specified are for parasols with MayTex-Acyl covering fabric that are mounted in an anchor tube (S2118, S2146 S2150). The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	S2201 +14 cm
Full frame pedestal:	S2203 +17 cm
Full frame pedestal:	S2205 +21 cm
Full frame pedestal:	S2411 +9 cm
Full frame pedestal:	S2412 +12 cm
Full frame pedestal:	S2414 +16 cm
Full frame pedestal:	S2420 +19 cm
Anchor plate:	S2131 +15 cm
Anchor plate:	S2261 +5 cm
Base plate:	S2272 +4 cm
Base plate:	S2273 +4 cm
Base plate:	S2274 +4 cm
Base plate:	S2275 +4 cm

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.



Intermediate and special sizes on request.
Dimensional tolerance approx. ± 5%

